



## 公司簡介及 理念

台龍食品包裝機械有限公司，創立於一九七七年，專業製造生產高速橫式自動包裝機，所製造的產品均以追求高品質高效率機種為目標，至目前為止已達國際化之水準。

在國內的穩定成長之下，我們已跨出國際，並外銷多國，已堂堂邁入成熟穩定之階段，且有一定的比例成長。

多年來，承蒙國內外商家厚愛推薦，促使本公司出產之機械產品於同業中大放異彩，行銷世界；同時，國外廠商自動尋求報價日漸增多，證明本公司產品深獲肯定。

今後敝公司的理念及目標，是製造更精密與更高品質的機種來服務各界商翁，盼望不久的將來，我們有機會為各界商家服務。

## Company's Introduction And Faith

TAI DRAGON MACHINERY CO., LTD. was established in 1977, specializing in the manufacture of High-Speed Horizontal Wrapping Machines. The machinery we make is based on the goal of pursuing high quality & efficiency and has reached the international level so far.

After the steady growth in the local market, we have stepped into the international market. We also have reached the steady stage and grown with a certain proportion.

In order to offer the fast service and supply the parts as soon as possible both in the locate & foreign market, we have set up on after-service network in the foreign areas.

The goal and faith of our company is to manufacture machines which are not only economic price but also more precious. We hope we'll have chance to serve for many people near the future.

## TD-200 小型自動包裝機 Small Auto-Packer

### 機械特點 / Feature

此機型結構設計精密，體積小、不佔空間，適用於門市店面。包裝尺寸可靈活調整，適合少量多樣之產品包裝需求。 Compact machine structure and suitable for retail store. Easy to operate, packing size can be modified at customers' request. Suitable for small-volume and large-variety production.

### 適用包裝物 / Application

此機適用於小型固體物包裝，如鳳梨酥、牛軋糖、巧克力、小點心等食品類；五金類等材料包裝亦適用於本機型。 Ideal for smaller sized articles and solids such as Pineapple cake, Nougat, Chocolates and Cookies. This machine is also suitable for Hardware packing.



### 規格表 / Specification

機身 / Machine	
總長 Length(cm)	230
總寬 Width(cm)	72
總高 Height(cm)	140
淨重 Net Weight(N.W.Kg)	475
毛重 Gross Weight(G.W.Kg)	625
電源 / Electric	
電壓 Voltage(V)	220
馬力 Main Motor(HP)	1(DC)
電熱 Electric Heater(KW)	2.4KW 220V
控制方式 Control System	彩色人機，配合 PLC 控制 Colorful HMI Controlled By PLC
頻率 Frequency(HZ)	60
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button

包裝型式 / Package	
封口方式 Sealing Mode	連續式熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
封口數目 Sealing Sides	三面封口 Seal By Three Sides
包裝速度 Packing Speed (Bags/Min)	25-150(視包裝物與材料而定) 25-150 ppm, Depending On Packing Size & Material
最大包裝材料寬度 (mm) Max. Width Of Packing Material	300
最大包裝物尺寸 (mm) Max. Packing Size	150×100×40 (L×W×H)
最小包裝物尺寸 (mm) Min. Packing Size	40×15×3 (L×W×H)

# TD-300 橫式自動包裝機

## Horizontal Auto Wrapping Machine

### 機械特點 / Feature

此機型可包裝各種不同之固態物品，亦能多元化包裝，適合少量多樣之產品包裝需求。

This type of auto packing machine is designed for small volume and it compact in size. Adjustable speed allows for even low volume products.

### 適用包裝物 / Application

此機適用於各種固體產品，如麵包、花生糖、海苔包裝、漢堡、餅乾等食品類，以及盥洗用具、香皂或五金類。

Ideal for products such as Bread, Nougat, Dried Seaweed, Hamburger, Cookies, Toiletries, Soap, Hardware and other solid products.



### 規格表 / Specification

機身 / Machine		包裝型式 / Package	
總長 Length(cm)	325	封口方式 Sealing Mode	連續式熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
總寬 Width(cm)	100	封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
總高 Height(cm)	145	封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
淨重 Net Weight(N.W.Kg)	750	進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
毛重 Gross Weight(G.W.Kg)	1050	出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
<b>電源 / Electric</b>		封口數目 Sealing Sides	三面封口 Seal By Three Sides
電壓 Voltage(V)	220	包裝速度 Packing Speed (Bags/Min)	25-200 裝物與材料而定 ) 25-200 ppm , Depending On Packing Size & Material
馬力 Main Motor(HP)	1(DC)	最大包裝材料寬度 (mm) Max. Width Of Packing Material	400
電熱 Electric Heater(KW)	2.4KW 220V	最大包裝物尺寸 (mm) Max. Packing Size	300×140×65 (L × W × H)
控制方式 Control System	光電開關配合內藏式速度控制鈕 Electrical Switch With The Hided Speed Control Button	最小包裝物尺寸 (mm) Min. Packing Size	80×30×6 (L × W × H)
頻率 Frequency(HZ)	60		
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button		

# TD-300ESC-WL 吸管自動包裝機


## Straw Auto-Wrapping Machine

### 機械特點 / Feature

1. 此機型為中型包裝機，可放置最大包裝塑膠膜寬度為 500mm。
  2. 具有可調式製袋成型器，容易更換各種包裝物尺寸。
  3. 包裝膠膜長度採用按鍵式設定，不浪費膠膜。
1. This straw auto-wrapping machine is for medium size with maximum 500mm plastic wrap.  
 2. Adjustable bag formation, easy to change packing size.  
 3. Touch-dial length set-up to reduce usage of plastic wrap.

### 適用包裝物 / Application

適用於固體散狀之集中包裝，如吸管。  
 Ideal for products such as Straw.

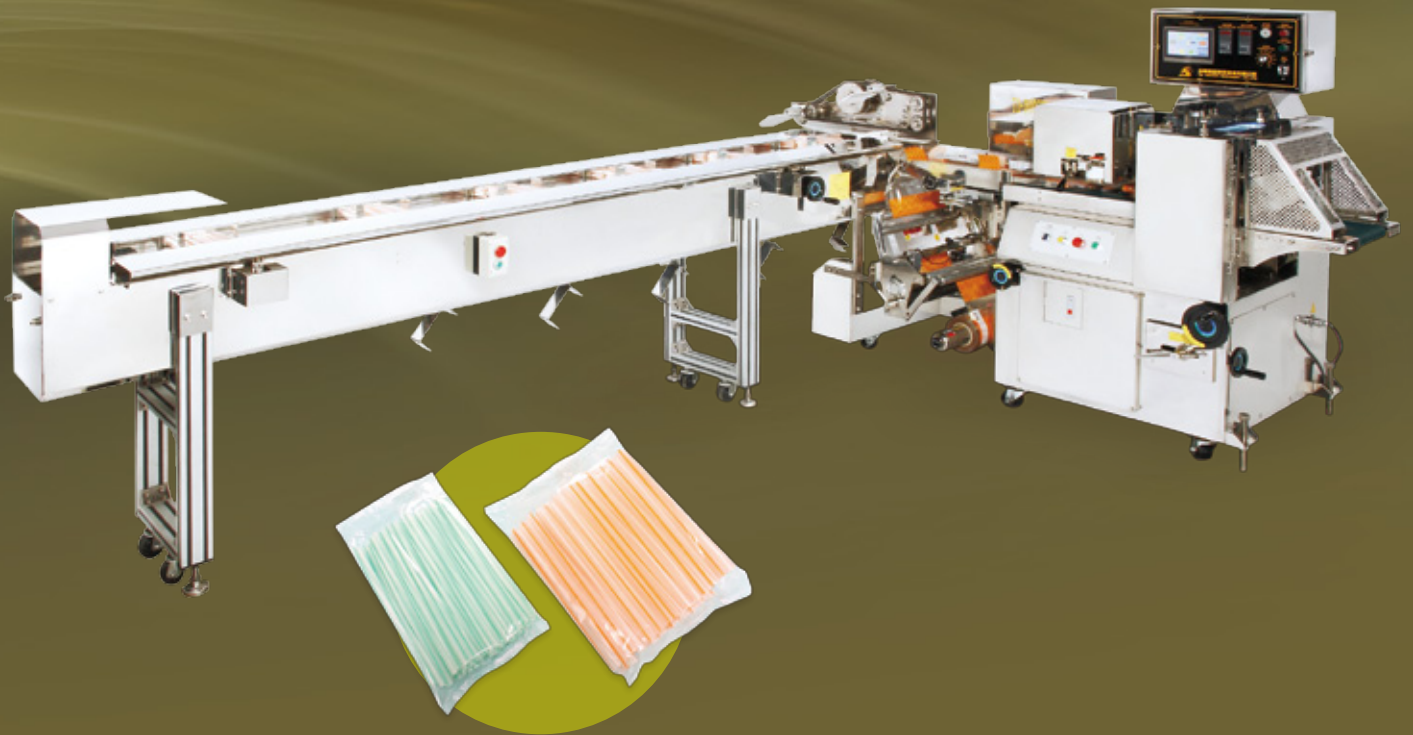

### 規格表 / Specification

機身 / Machine	
總長 Length(cm)	260
總寬 Width(cm)	100
總高 Height(cm)	150
淨重 Net Weight(N.W.Kg)	900
毛重 Gross Weight(G.W.Kg)	1200

電源 / Electric	
電壓 Voltage(V)	220
馬力 Main Motor(HP)	1(DC)
電熱 Electric Heater(KW)	2.4KW 220V
馬達 Motor	伺服馬達 1HP(AC) Server motor 1HP(AC)
控制方式 Control System	彩色人機、配合 PLC 控制 Colorful HCl Controlled By PLC
頻率 Frequency(HZ)	60
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button

包裝型式 / Package	
封口方式 Sealing Mode	下袋式連續熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
進料方式 Feeding Method	進料輸送袋 Infeed Conveyor With Packing Film Surface
出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
封口數目 Sealing Sides	三面封口 Seal By Three Sides
包裝速度 Packing Speed (Bags/Min)	10-120(視包裝物與材料而定) 10-120 ppm, Depending On Packing Size & Material
最大包裝材料寬度 (mm) Max. Width Of Packing Material	500
最大包裝物尺寸 (mm) Max. Packing Size	300×200×100 (L × W × H)
最小包裝物尺寸 (mm) Min. Packing Size	150×50×10 (L × W × H)

# TD-400 橫式自動包裝機

## Horizontal Auto Wrapping Machine

### 機械特點 / Feature

此機種最適用於包裝物量產之廠家，包裝速度快，高速運轉不影響包裝外觀，亦能多元化包裝。

This auto-wrapping machine is suitable for companies that require a high speed production. This machine features consistent heat sealing even on high speed rates. Suitable for a wide range of solid products. It can be modified to suit special products upon the customers' request.

### 適用包裝物 / Application

各種固體產品，如麵包、速食麵、熱狗、薑餅等食品類、餐紙巾封口、口罩等五金類。

Ideal for products such as Bread, Instant Noodles, Hot Dog, Cake, Napkin and Surgical Mask.



### 規格表 / Specification

機身 / Machine	
總長 Length(cm)	380
總寬 Width(cm)	100
總高 Height(cm)	161
淨重 Net Weight(N.W.Kg)	900
毛重 Gross Weight(G.W.Kg)	1200
電源 / Electric	
電壓 Voltage(V)	220
馬力 Main Motor(HP)	1(DC)
電熱 Electric Heater(KW)	2.4KW 220V
控制方式 Control System	光電開關配合內藏式速度控制鈕 Electrical Switch With The Hided Speed Control Button
頻率 Frequency(HZ)	60
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button

包裝型式 / Package	
封口方式 Sealing Mode	連續式熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
封口數目 Sealing Sides	三面封口 Seal By Three Sides
包裝速度 Packing Speed (Bags/min)	25-200(視包裝物與材料而定) 25-200 ppm, Depending On Packing Size & Material
最大包裝材料寬度 (mm) Max. Width of Packing Material	500
最大包裝物尺寸 (mm) Max. Packing Size	320×200×80 (L × W × H)
最小包裝物尺寸 (mm) Min. Packing Size	120×45×9 (L × W × H)

# TD-500 橫式自動包裝機

## Horizontal Auto Wrapping Machine

### 機械特點 / Feature

此機型適用於包裝大型固態物品，高速運轉不影響包裝外觀，適合包裝物量產之廠家。

This auto-wrapping machine is suitable for large size of solid products. This machine features consistent heat sealing even on high speed rates. It can be modified to suit special products upon the customers' request.

### 適用包裝物 / Application

各種大型固體產品，例如米粉、面紙或餐巾紙產品。

Ideal for products such as Rice Noodles, Tissue Paper or Napkin etc.



### 規格表 / Specification

機身 / Machine		包裝型式 / Package	
總長 Length(cm)	476	封口方式 Sealing Mode	連續式熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
總寬 Width(cm)	110	封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
總高 Height(cm)	192	封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
淨重 Net Weight(N.W.Kg)	900	進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
毛重 Gross Weight(G.W.Kg)	1200	出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
<b>電源 / Electric</b>		封口數目 Sealing Sides	三面封口 Seal By Three Sides
電壓 Voltage(V)	220	包裝速度 Packing Speed (Bags/min)	25-150(視包裝物與材料而定) 25-150 ppm, Depending On Packing Size & Material
主馬達 (HP) Main Motor(HP)	1(DC)	最大包裝材料寬度 (mm) Max. Width of Packing Material	700
馬達 Motor	伺服馬達 1HP(AC) Servo Motor 1HP (AC)	最大包裝物尺寸 (mm) Max. Packing Size	350×250×120 (L × W × H)
電熱 Electric Heater(KW)	2.44KW 220V	最小包裝物尺寸 (mm) Min. Packing Size	100×70×10 (L × W × H)
控制方式 Control System	光電開關配合內藏式速度控制鈕 Electrical Switch With The Hided Speed Control Button		
頻率 Frequency(HZ)	60		
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button		

# TD-600ESP 仰式自動包裝機

## Top Seal Auto Wrapping Machine

### 機械特點 / Feature

1. 此機為大型包裝機，可放置之最大包裝塑膠膜寬度為 700mm。
  2. 活動製袋成型器，容易更換各種包裝物尺寸。
  3. 包裝膠膜長度採用按鍵式設定長度，不浪費膠膜。
  4. 電眼追蹤系統用傘型齒輪傳動，容易定位封切。
- 1.This Top Seal Auto-Packing Machine is large size with maximum 700mm plastic wrap.
  - 2.Adjustable bag formation, easy to change packing size.
  - 3.Touch-dial length set-up to reduce usage of plastic wrap.
  - 4.Electric spotting bevel gear to assist in easy positioning and cutting.

### 適用包裝物 / Application

適用於固體散狀之集中包裝，如包子、饅頭、速食麵、冰棒等等。  
Solid materials can be packed together such as Steamed Pie, Steamed Dumpling, Instant Noodle, Ice-Bar etc.



### 規格表 / Specification

機身 / Machine		包裝型式 / Package	
總長 Length(cm)	532	封口方式 Sealing Mode	下袋式連續熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
總寬 Width(cm)	109	封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
總高 Height(cm)	154	封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
淨重 Net Weight(N.W.Kg)	1650	進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
毛重 Gross Weight(G.W.Kg)	1950	出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
<b>電源 / Electric</b>		封口數目 Sealing Sides	三面封口 Seal By Three Sides
電壓 Voltage(V)	220	包裝速度 Packing Speed (Bags/min)	10-150(視包裝物與材料而定) 10-150 ppm, Depending On Packing Size & Material
主馬力 Main Motor(HP)	3(HP)	最大包裝材料寬度 (mm) Max. Width of Packing Material	700
電熱 Electric Heater(KW)	3.6KW 220V	最大包裝物尺寸 (mm) Max. Packing Size	400×250×110 (L × W × H)
控制方式 Control System	光電開關配合內藏式速度控制鈕 Electrical Switch With The Hided Speed Control Button	最小包裝物尺寸 (mm) Min. Packing Size	200×75×15 (L × W × H)
頻率 Frequency(HZ)	60		
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button		

# TD-600ESC 蔬菜類自動包裝機

## Vegetable Auto-Wrapping Machine

### 機械特點 / Feature

本機適用於一般的葉菜類蔬菜的自動化小包裝作業，作業能力每分鐘可達 35 包以上，適用於蔬菜生產合作社及蔬菜集貨場或農會蔬菜產銷班使用。本機已通過行政院農業委員會農業試驗所之「農機性能測定」，性能優越，為目前取代人工作業包裝之首套葉菜類自動包裝機。

This Top Seal Auto-Wrapping Machine is suitable for the compact packing of general leaf type vegetables and has a packing speed of over 35 bags per minute with excellent performance. It allows for the placement of soft leaf type vegetables directly onto the flat film surface which then automatically forms the bag around the product eliminating the need for manual packing. Designed for use by vegetable distributors, farming co-operatives and market providers it has been tested and approved by the Taiwan Agricultural Research Institute Council of the Agricultural Executive Yuan.

### 適用包裝物 / Application

適合包裝不等長度之包裝物，如各種葉菜類、根莖類蔬菜等等。

For packing the goods with varied length, i.e. the various leaf vegetables, rootstalk etc.



### 規格表 / Specification

機身 / Machine		包裝型式 / Package	
總長 Length(cm)	532	封口方式 Sealing Mode	下袋式連續熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
總寬 Width(cm)	109	封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
總高 Height(cm)	154	封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
淨重 Net Weight(N.W.Kg)	1650	進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
毛重 Gross Weight(G.W.Kg)	1950	出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
電源 / Electric		封口數目 Sealing Sides	三面封口 Seal By Three Sides
電壓 Voltage(V)	220	包裝速度 Packing Speed (Bags/min)	每分鐘 35 包以上 35 Bags/Min
馬力 Main Motor(HP)	3(HP)	最大包裝材料寬度 (mm) Max. Width of Packing Material	700
電熱 Electric Heater(KW)	3.6KW 220V	最大包裝物尺寸 (mm) Max. Packing Size	長度依電眼偵測而定 ×250×110 (L × W × H) Length Decided By Auto Sensing System ×250×110 (L × W × H)
控制方式 Control System	彩色人機，配合 PLC 控制 Colorful HCl Controlled By PLC	最小包裝物尺寸 (mm) Min. Packing Size	200×75×15 (L × W × H)
頻率 Frequency(HZ)	60		
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button		



# TD-850ESP 仰式自動包裝機

## Top Seal Auto Wrapping Machine

### 機械特點 / Feature

1. 此機為加大型包裝機，可放置最大包裝塑膠膜寬度為 850mm。
  2. 活動製袋成型器，容易更換各種包裝物尺寸。
  3. 包裝膠膜長度採用按鍵式設定長度，不浪費膠膜。
  4. 電眼追蹤系統用傘型齒輪傳動，容易定位封切。
1. This Steamed Buns Packing Machine is for extra large size with maximum 850mm plastic wrap.
  2. Adjustable bag formation, easy to change packing size.
  3. Touch-dial length set-up to reduce usage of plastic wrap.
  4. Electric spotting bevel gear to assist in easy positioning and cutting.



### 適用包裝物 / Application

適用於固體散狀之集中包裝，如包子、饅頭、速食麵、冰棒等等。  
Solid materials can be packed together such as Steamed Pie, Steamed Dumpling, Instant Noodle, Ice-Bar etc.



### 規格表 / Specification

#### 機身 / Machine

總長 Length(cm)	532
總寬 Width(cm)	130
總高 Height(cm)	200
淨重 Net Weight(N.W.Kg)	1650
毛重 Gross Weight(G.W.Kg)	1950

#### 電源 / Electric

電壓 Voltage(V)	220
馬力 Main Motor(HP)	3(HP)
電熱 Electric Heater(KW)	4.65KW 220V
控制方式 Control System	光電開關配合內藏式速度控制鈕 Electrical Switch With The Hided Speed Control Button
頻率 Frequency(HZ)	60
安全裝置 Safety Device	安全網開啟自動斷電及緊急按鈕 Emergency Stop Button

#### 包裝型式 / Package

封口方式 Sealing Mode	下袋式連續熱熔封切包裝 Continuous Sealing With Heated Crimp Wheel And Straight Bar End Seal
封口構造 Sealing Structure	可調式製袋器與迴轉式熱熔封切刀 Adjustable Rotating End Seal Bars
封口型式 Sealing Style	製袋器牽引膠帶與熱熔方式封袋 Former, Controls Film & Heat Melt
進料方式 Feeding Method	進料輸送袋 Feeding Conveyor With Pusher
出料方式 Discharge Method	出料輸送袋 Discharge With Conveyor Belt
封口數目 Sealing Sides	三面封口 Seal By Three Sides
包裝速度 Packing Speed (Bags/min)	10-150(視包裝物與材料而定) 10-150 ppm; Depending On Packing Size & Material
最大包裝材料寬度 (mm) Max. Width of Packing Material	850
最大包裝物尺寸 (mm) Max. Packing Size	420×400×125 (L×W×H)
最小包裝物尺寸 (mm) Min. Packing Size	240×90×18 (L×W×H)

## 產品特色 / Special Feature

1. 可調式製袋器可依據包裝物的寬度自由調整。
  2. 長度與切斷位置可自由調整，調整時不必停機，附有包裝袋長度顯示器。
  3. 特殊設計的傳動系統，微軟或微黏性的產品亦可包裝。
  4. 封切刀可設定於停機時自動向上定位，以避免包裝袋耗損。
  5. 高靈敏度的電眼追蹤系統，確保高速運轉時依然可準確地於設定位置切斷。
  6. 輸送帶與電熱系統為各自獨立控制，停機時將不影響電熱系統。
  7. 背封與封切刀皆具有獨立的控溫器，以穩定封口溫度的準確性。
  8. 所配備之壓風刷可穩定輸送中之包裝物，並排出袋內多餘的空氣。
  9. 鋼製輸送帶長度均可依據客戶需求訂製。
  10. 主要傳動系統均採用螺旋傘齒輪傳動，此裝置可提升機械壽命與電眼追蹤系統之準確度。
  11. 與包裝物之接觸面皆為不鏽鋼材質
1. Adjustable former (easy to adjust to required width & height).
  2. Cut-off length/position is also adjustable; TD serial wrapping machine is specially designed in the way that it can be adjusted during the operation without having to stop the machine.
  3. This machine can handle little soft & sticky products, due to the special conveying systems.
  4. The end sealer is always at the up-right position, when ever its stop.
  5. High accuracy photo sensing system. This is to ensure correct cut-off at photo-mark position even the machine is running at high speed.
  6. Conveyor switch is independent, it can control separately from the master switch, and this is to ensure heaters will not off at the same time when the conveyor switch is off.
  7. TD serial wrapping machine come with individual heaters temperature control meters, this is to ensure that the accuracy of the temperature control.
  8. Transfer brushes (hold products in position as well as to reduce excess air remain in the bags).
  9. Conveyor can be customer-made to specifications.
  10. The main transmitting system are all adopted spiral bevel gear for shifting which can be not only prolonged the servicing live but advanced the accuracy of photo-eye detecting device.
  11. Connected parts with product made by stainless steel.

## 選購附件 / Optional Equipment

1. 日期打字機
  2. 折角系統
  3. 充氣系統
  4. 送料輸送帶 (可訂製加長)
1. Date Printer.
  2. Angle Bending Device.
  3. Nitrogen Filling Device.
  4. Feeding Conveyor (It can be custom-made to increase length).

## 適用包裝袋材質 / Packing Material

1. CPP. PP 防潮膠膜
  2. KOP. FOH 膠膜
  3. PE 淋膜玻璃紙
  4. PE 淋膜鋁薄紙
  5. OPP + PE 淋膜膠紙
  6. PET + PE 淋膜膠紙 (保特膠膜 + PE)
  7. NYLON + PE 淋膜膠紙 (耐龍膠膜 + PE)
1. CPP PP damp-proof film
  2. KOP. FOH film
  3. PE cellophane
  4. PE foil laminate
  5. OPP + PE tape
  6. PET + PE tape (keep the adhesive)
  7. NYLION + PE tape (nylon tape + PE)

## 適用產品 / Application

各種固體產品如：麵包、餅干、蛋糕、巧克力、冰淇淋產品、臘(香)腸、乳酪、通心麵、乾麵(速食麵)、香皂、瓶裝物、化妝紙、擦拭紙(衛生紙類)、醫療器材、五金零件、機械零件、塑膠射出成型品類等。

For any solid products ; such as bread, cookies, cakes, chocolates, ice cream, sausage, cheese, dried noodles(instant noodles), soap, products which is put in the bottles, tissue, wiping paper(toilet paper), medical instruments, auto-parts, Hardware parts, machinery parts, plastic injection etc.